



GENERAL NOTES:


- UNITS ARE SEALED WITH BUTYL
 TAPE AT THE JOINTS
- 2. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
- EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
- 4. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
- 5. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT
- 6. MAXIMUM BURIAL DEPTH = 1 METRE IN FIRM SOIL AWAY FROM ANY VEHICULAR TRAFFIC



TOILET RISER OPENING (TYP.) SCALE:1/16

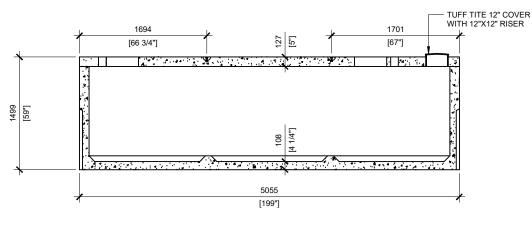

SECTION A SCALE: 1/50



SECTION B SCALE:1/50

BROOKLIN CONCRETE PRODUCTS

MANUFACTURED: BROOKLIN, ON 1-800-655-3430 CONCRETE: 35MPa/5000PSI
AIR ENTRAINMENT: 5-8%
MEETS CAN/CSA-B66-00

REINFORCEMENT: STEEL TO CSA CAN A23.1 /A23.3 G30.18 Fy=400MPa **WEIGHT:** 27,180lbs / 12,330kg

DRAWN BY: S.RIMLAND PRIVY 11000 (WOOD STRUCTURE)

DATE: MAR/2021

11,000 LITRES