
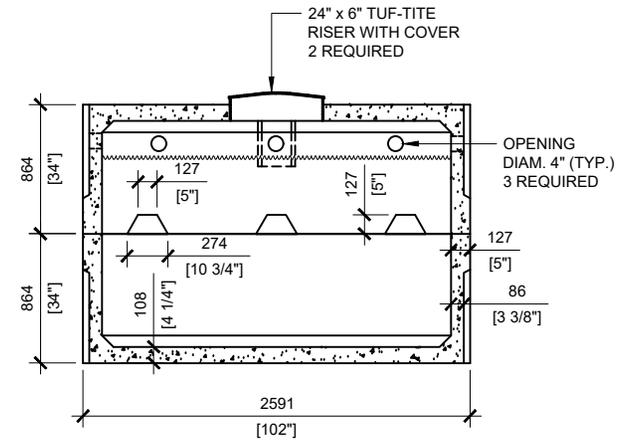


**GENERAL NOTES:**

1. UNITS ARE SEALED WITH BUTYL TAPE AT THE JOINTS
2. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
3. EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
4. MIN OVERHEAD CLEARANCE OF 18FT IS REQUIRED
5. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT
6. MAXIMUM BURIAL DEPTH = 1 METRE IN FIRM SOIL AWAY FROM ANY VEHICULAR TRAFFIC

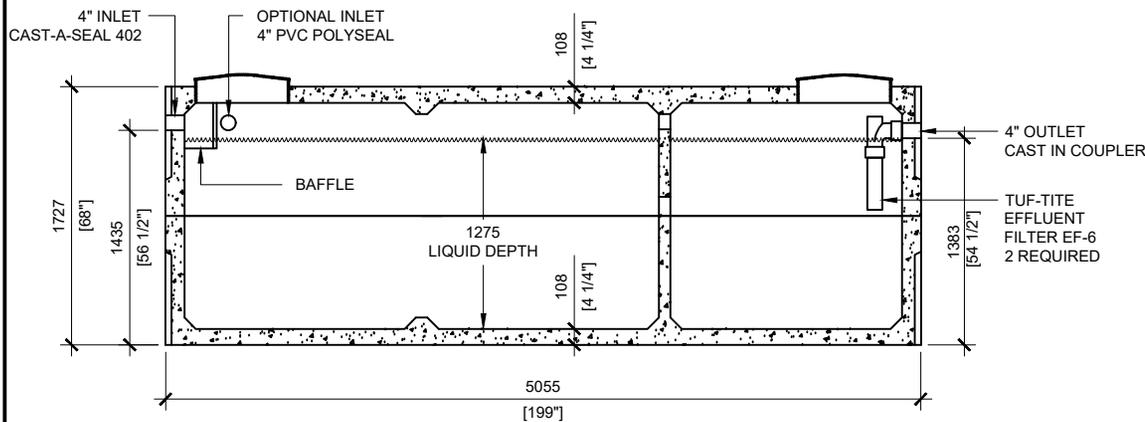

MANUFACTURED:  
BROOKLIN, ON  
1-800-655-3430

CONCRETE: 35MPa at 28 days / 5000PSI  
AIR ENTRAINMENT: 5-8%  
REINFORCEMENT: STEEL TO CSA CAN  
A23.1 /A23.3 G30.18 Fy=400MPa

WEIGHT: 26,142lbs / 11,857kg  
BOTTOM: 13,281lbs / 6,024kg  
TOP: 12,861lbs / 5,833kg  
CPA CERTIFIED  
MEETS CAN/CSA-B66

DRAWN BY:  
S.RIMLAND

DATE:  
JAN/2019

**13650 LITRES** **SEPTIC TANK**  
3,000 IMPERIAL GALLON

WORKING CAPACITY: 14,003L TO INVERT OF OUTLET

TOTAL CAPACITY: 16,528L TO UNDERSIDE OF CHAMBER LID