


TOP VIEW
SCALE: 1/30

1" HOLES FOR ANCHORING. 4 REQUIRED.
3 3/4" SWIFT LIFT 4 REQUIRED.


GENERAL NOTES:

1. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
2. EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
3. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
4. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT (I.E. SPREADER BAR)
5. BROOM FINISHED
6. PLACE PRECAST PLANKS ON A MINIMUM 6" CRUSHED ROCK BASE

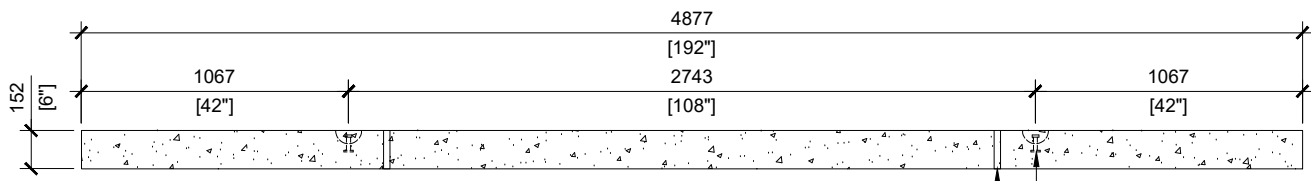


SECTION A
SCALE: 1/30

1" HOLES FOR ANCHORING. 4 REQUIRED.
3 3/4" SWIFT LIFT 4 REQUIRED.

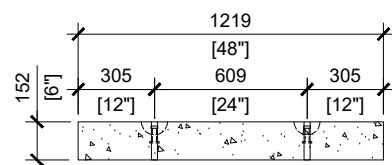

SECTION B
SCALE: 1/30

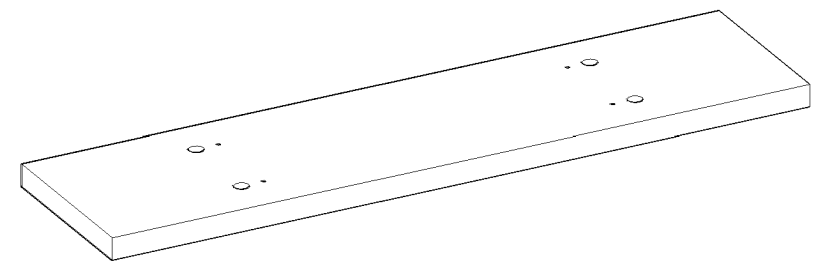

MANUFACTURED:
LINDSAY, ON
1-800-655-3430

CONCRETE: 35MPa / 5000PSI
AIR ENTRAINMENT: 5-8%
REINFORCEMENT: STEEL TO CSA CAN
A23.1 / A23.3. G30.18 Fy=400MPa

WEIGHT: 3,546lbs/1,600kg

DRAWN BY:
PRASHAN

DATE:
MAR/2024

16' BOAT RAMP