



## **GENERAL NOTES:**

- 1. UNITS ARE SEALED WITH BUTYL TAPE AT THE JOINTS
- 2. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
- 3. EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
- 4. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
- 5. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT
- 6. MAXIMUM BURIAL DEPTH = 1 METRE IN FIRM SOIL AWAY FROM ANY VEHICULAR TRAFFIC

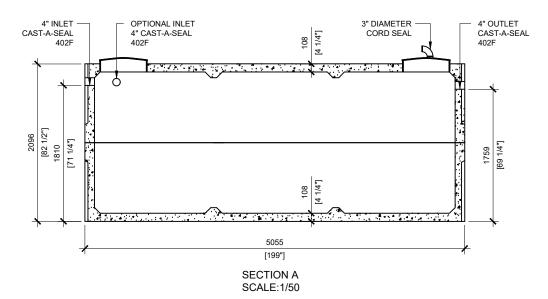



MANUFACTURED: BROOKLIN, ON 1-800-655-3430

CONCRETE: 35MPa at 28 days / 5000PSI AIR ENTRAINMENT: 5-8%

REINFORCEMENT: STEEL TO CSA CAN A23.1 /A23.3 G30.18 Fy=400MPa

WEIGHT: 31,140lbs / 14,125kg BOTTOM: 15,780lbs / 7,157kg **TOP:** 15,360lbs / 6,967kg **CPA CERTIFIED** MEETS CAN/CSA-B66 "AGINP"

DRAWN BY: **18000 LITRES** N.CHAN

**4000 IMPERIAL GALLON** 

TOTAL CAPACITY: 21006L TO UNDERSIDE OF CHAMBER LID

SINGLE CHAMBER

DATE: WORKING CAPACITY: 19,115L TO INVERT OF INLET JAN/2020