


SECTION B
SCALE:1/50



GENERAL NOTES:

1. UNITS ARE SEALED WITH BUTYL TAPE AT THE JOINTS
2. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
3. EXCAVATION MUST BE READY FOR INSTALL
4. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
5. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT
6. MAXIMUM BURIAL DEPTH = 1 METRE IN FIRM SOIL AWAY FROM ANY VEHICULAR TRAFFIC
7. TUF-TITE SAFETY LIDS INSTALLED IN BOTH OPENINGS AS PER CSA-B66-21

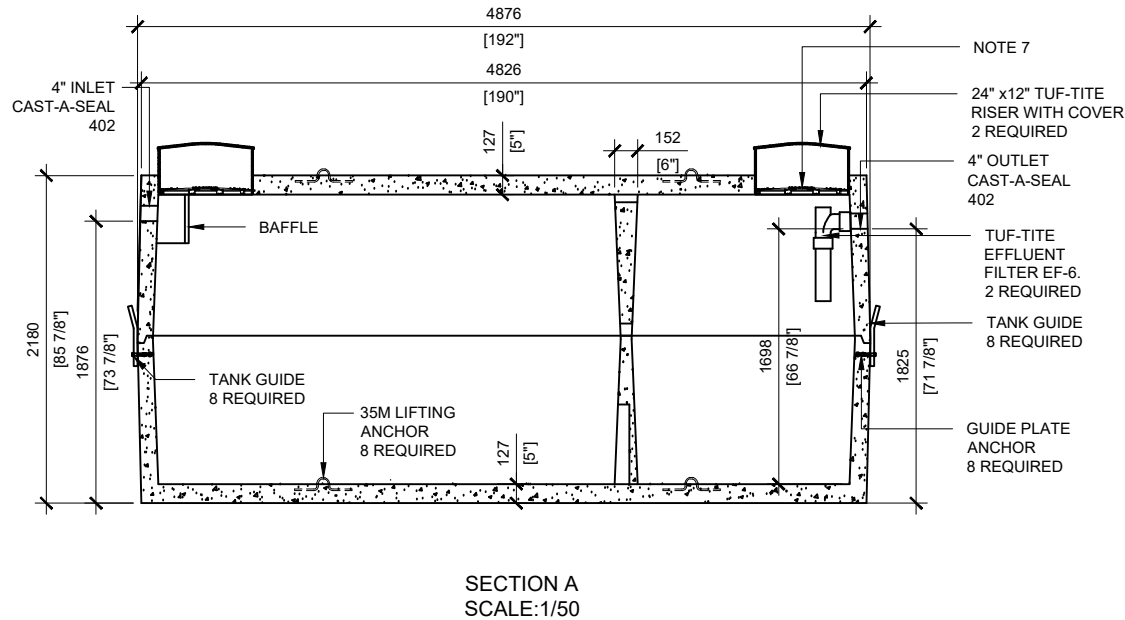

MANUFACTURED:
OTTAWA, ON
1-800-655-3430

CONCRETE: 40MPa at 28 days / 5,800PSI
AIR ENTRAINMENT: 5-8%
REINFORCEMENT: STEEL TO CSA CAN
A23.1 / A23.3 G30.18 Fy=400MPa

WEIGHT: 35,360lbs / 16,039kg
BOTTOM: 17,747lbs / 8,050kg
TOP: 17,613lbs / 7,989kg
CSA APPROVED
"AGINP"

DRAWN BY:
JAY PATEL

DATE:
APRIL/2022

18000 LITRES

SEPTIC TANK

WORKING CAPACITY: 18,056L TO INVERT OF OUTLET
TOTAL CAPACITY: 20,452L TO UNDERSIDE OF CHAMBER LID