



TOP VIEW  
SCALE: 1/50

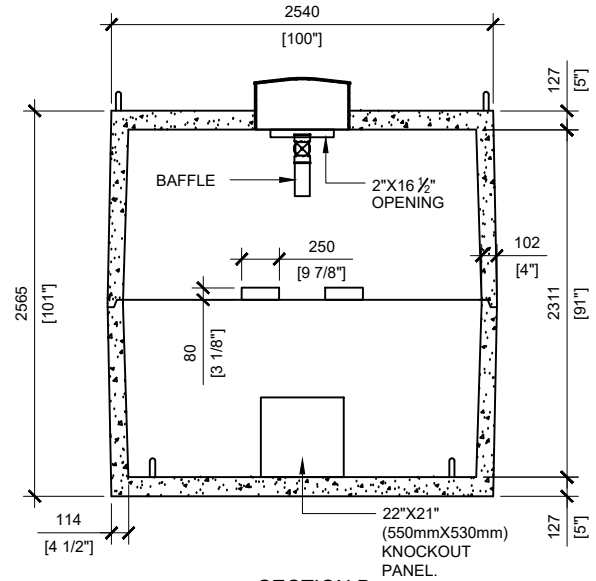

SECTION B  
SCALE: 1/50

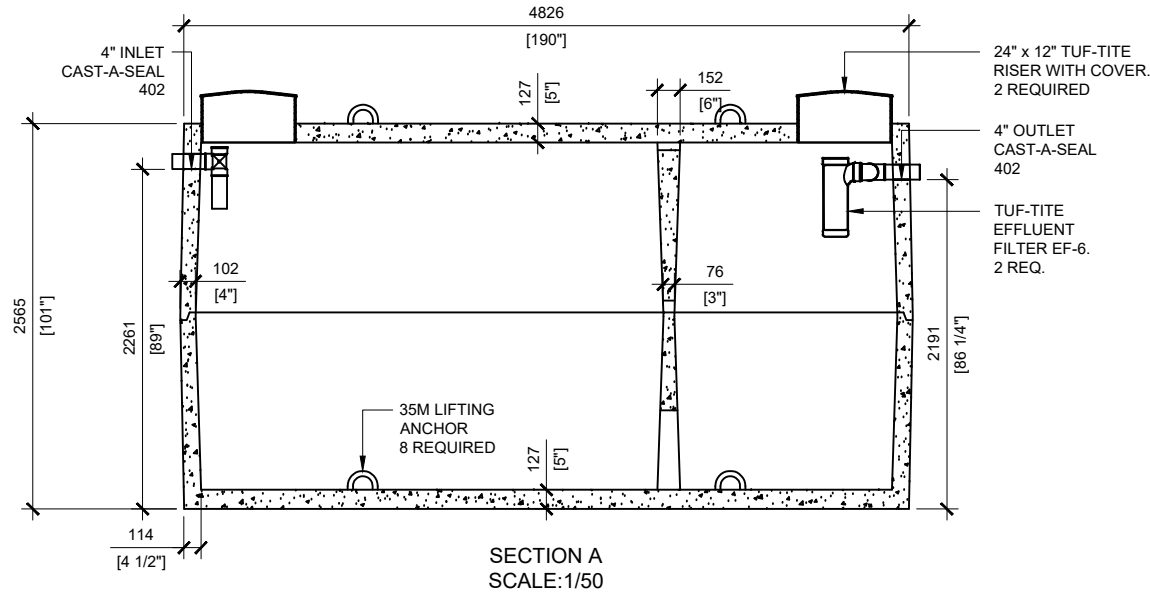

SECTION A  
SCALE: 1/50

**GENERAL NOTES:**

1. UNITS ARE SEALED WITH BUTYL TAPE AT THE JOINTS
2. CONTRACTOR TO ENSURE CRANE IS ON-SITE TO OFFLOAD AND SET TANK
3. EXCAVATION MUST BE READY FOR INSTALL
4. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
5. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT
6. MAXIMUM BURIAL DEPTH = 1 METRE IN FIRM SOIL AWAY FROM ANY VEHICULAR TRAFFIC (TRAFFIC RATING AVAILABLE UPON REQUEST)



MANUFACTURED:  
BROOKLIN, ON  
1-800-655-3430

CONCRETE: 45MPa at 28 days / 6,500PSI  
AIR ENTRAINMENT: 5-8%  
REINFORCEMENT: STEEL TO CSA CAN  
A23.1 /A23.3 G30.18 Fy=400MPa

WEIGHT: 40,146lbs / 18,210kg  
CSA APPROVED  
MEETS CAN/CSA-B66  
"AGINP"

DRAWN BY:  
N.CHAN

DATE:  
FEB/2020

**22750 LITRES**  
5,000 IMPERIAL GALLON

**SEPTIC TANK**

5,000 IMPERIAL GALLON / 22,750 LITRES SEPTIC