



TOP VIEW  
SCALE: 1/50

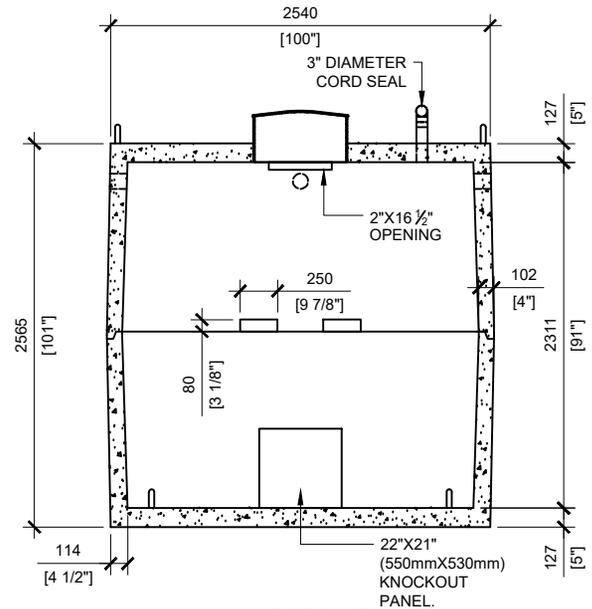

SECTION B  
SCALE: 1/50

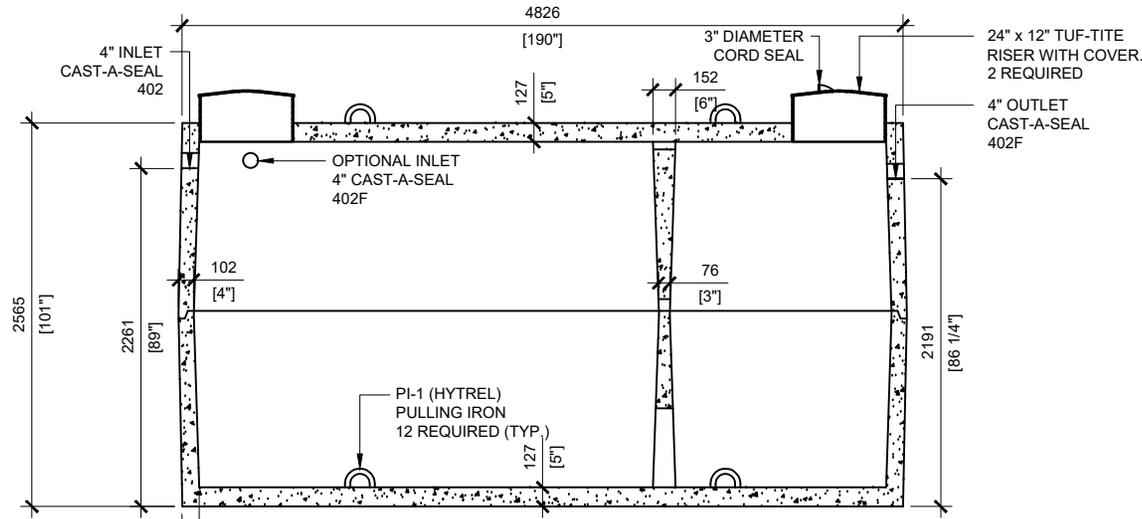

SECTION A  
SCALE: 1/50

**GENERAL NOTES:**

1. UNITS ARE SEALED WITH BUTYL TAPE AT THE JOINTS
2. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
3. EXCAVATION MUST BE READY FOR INSTALL
4. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
5. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT
6. TANK DESIGNED FOR A MAXIMUM FILL COVER DEPTH OF 1000mm, WITH 4.8 kPa LIVE LOAD, AND NO VEHICLE LOADING

\* AVAILABLE FOR TRAFFIC LOADING



MANUFACTURED:  
OTTAWA, ON  
1-800-655-3430

CONCRETE TYPE: SCC  
CONCRETE: 45MPa at 28 days / 6,500PSI  
AIR ENTRAINMENT: 5-8%  
REINFORCEMENT: STEEL TO CSA CAN  
A23.1 /A23.3 G30.18 Fy=400MPa

WEIGHT:  
BOTTOM - 19,866lbs / 9,030kg  
TOP - 19,338lbs / 8,813kg  
CSA APPROVED  
MEETS CAN/CSA-B66  
"AGINP"

DRAWN BY:  
N.CHAN

DATE:  
FEB/2020

**22750 LITRES** SINGLE  
**5,000 IMPERIAL GALLON** CHAMBER

WORKING CAPACITY: 22753L TO INVERT OF INLET

TOTAL CAPACITY: 24585L TO UNDERSIDE OF CHAMBER LID