


## **GENERAL NOTES:**

- 1. UNITS ARE SEALED WITH BUTYL TAPE AT THE JOINTS
- 2. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
- EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
- MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
- 5. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT
- MAXIMUM BURIAL DEPTH = 1 METRE IN FIRM SOIL AWAY FROM ANY VEHICULAR TRAFFIC



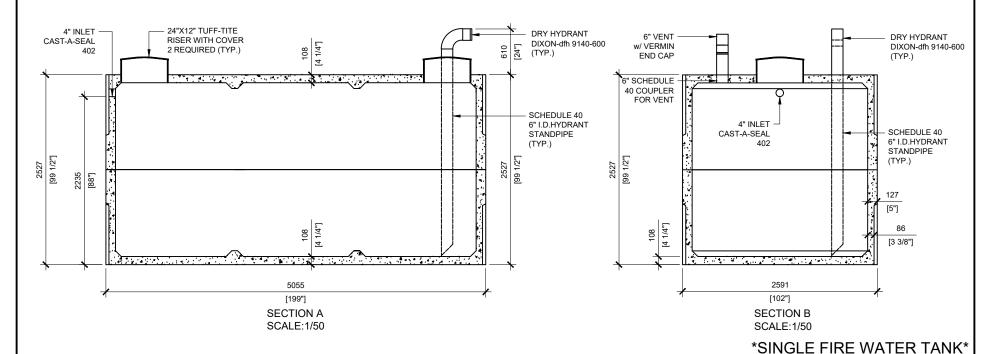

MANUFACTURED: BROOKLIN, ON 1-800-655-3430 CONCRETE: 35MPa/ 5000PSI
AIR ENTRAINMENT: 5-8%
REINFORCEMENT: STEEL TO CSA CAN
A23.1 /A23.3 G30.18 Fy=400MPa

WEIGHT: 34,870lbs / 15,850kg BOTTOM: 17,690lbs / 8,041kg TOP: 17,180lbs / 7,809kg CPA CERTIFIED MEETS CAN/CSA-B66 "AGINP"

DRAWN BY: N.CHAN	22750 LITRES 5000 IMPERIAL GALLON
DATE:	WORKING CAPACITY: 23,820L TO INVERT OF INLET
FEB/2020	TOTAL CAPACITY: 25,852L TO UNDERSIDE OF CHAMBER LID