

## **GENERAL NOTES:**

- 1. UNITS ARE SEALED WITH BUTYL TAPE AT THE JOINTS
- 2. DELIVERY IS MADE BY CRANE-EQUIPPED
- 3. EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
- 4. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
- 5. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT
- 6. MAXIMUM BURIAL DEPTH = 1 METRE IN FIRM SOIL AWAY FROM ANY VEHICULAR TRAFFIC


24" x 6" TUF-TITE RISER WITH COVER

4" OUTLET


402F

1092 [43"]

CAST-A-SEAL

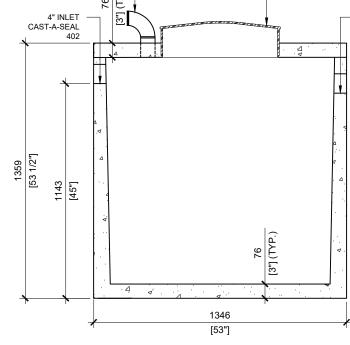

3" DIAL CORD SEAL

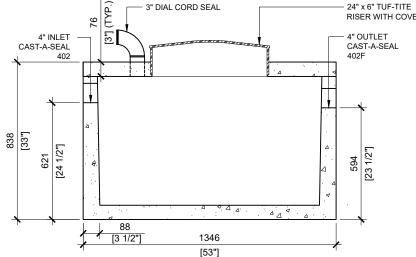

680 LITRES SECTION A SCALE: 1/20

1365 LITRES SECTION A SCALE: 1/20



MANUFACTURED: BROOKLIN, ON 1-800-655-3430

CONCRETE: 35MPa/5000PSI **AIR ENTRAINMENT**: 5-8% REINFORCEMENT: STEEL TO CSA CAN 1365 LITRES- 3,560 lbs / 1,618kg A23.1 /A23.3 G30.18 Fy=400MPa

WEIGHT: 680 LITRES- 2,600 lbs / 1,182kg CPA CERTIFIED MEETS CAN/CSA-B66 "AGINP"

DRAWN BY: S.RIMLAND	680 & 1365 LITRES	PUMP TANK
DATE:	WORKING CAPACITY: 719L & 1,435L TO INVERT OF INLET	
JAN/2020	TOTAL CAPACITY: 903L & 1,610L TO UNDERSIDE OF CHAMBER LI	D