



GENERAL NOTES:

- 1. CABLE ENTRY OPENINGS 4¾" PVC SEALS
- 2. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS, EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
- MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED.
- ALL UNITS MUST BE HANDLED
 WITH PROPER LIFTING
 EQUIPMENT.
 (I.E. SPREADER BAR).
- * TYPICAL USE WOULD REQUIRE JW500 CAST IRON FRAME AND COVER



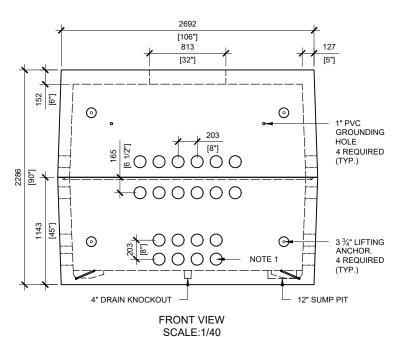

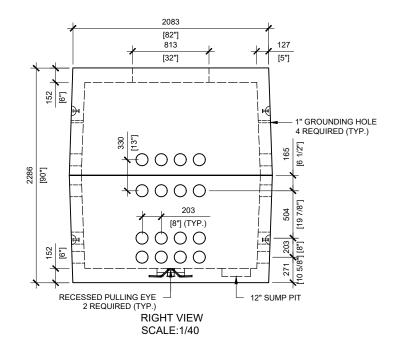

MANUFACTURED: LINDSAY, ON 1-800-655-3430 CONCRETE: 35MPa / 5,000PSI AIR ENTRAINMENT: 5-8%

REINFORCEMENT: STEEL TO CSA CAN A23.1 / A23.3. G30.18 Fy=400MPa

WEIGHT:

BCP104MH -20,485lbs / 9,290kg

| DRAWN BY: SR | BCP104MH |
|-----------------|----------------------------------|
| DATE: | PRECAST CONCRETE UTILITY MANHOLE |

JUN/2023 FOR BOULEVARD USE