




GENERAL NOTES:

- DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS, EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
- MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED.
- ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT(I.E. SPREADER BAR)

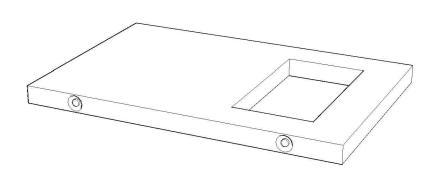

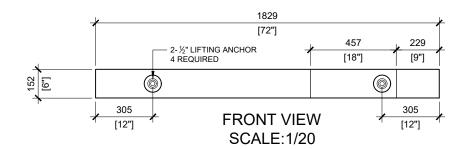



RIGHT VIEW SCALE:1/20



MANUFACTURED: BROOKLIN, ON 1-800-655-3430 CONCRETE: 35MPa / 5,000PSI AIR ENTRAINMENT: 5-8% REINFORCEMENT: STEEL TO CSA

CAN A23.1 / A23.3. G30.18 Fy=400MPa

WEIGHT:BCP112T6V- 1,018lbs / 462kg

DRAWN BY: N.CHAN

BCP112T6V

DATE: JAN/2021 PRECAST TOP FOR TRANSFORMER FOUNDATION