



GENERAL NOTES:

- CABLE ENTRY OPENINGS -4-3/4" PVC SEALS
- 2. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
- 3. EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
- 4. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
- 5. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT (I.E. SPREADER BAR)

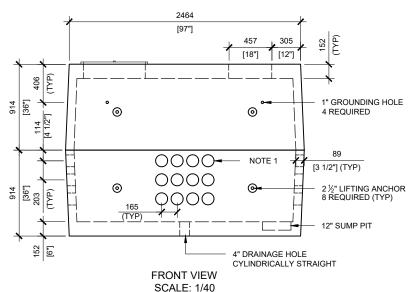

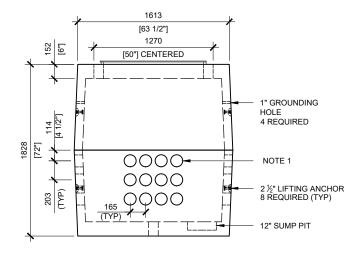

RIGHT VIEW SCALE: 1/40



MANUFACTURED: BROOKLIN, ON 1-800-655-3430 CONCRETE: 35MPa / 5,000PSI

AIR ENTRAINMENT: 5-8%
REINFORCEMENT: STEEL TO CSA
CAN A23.1 / A23.3. G30.18

Fy=400MPa

WEIGHT:

BCP113SM -10,300lbs / 4,680kg

DRAWN BY: S.RIMLAND BCP113SM

DATE: MAY/2020 FOUNDATION FOR PADMOUNT TRANSFORMER