




GENERAL NOTES:

- 1. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
- EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
- 3. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
- 4. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT (I.E. SPREADER BAR)

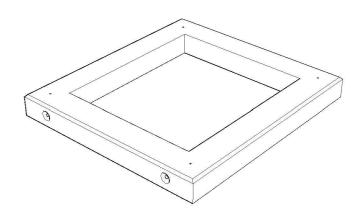

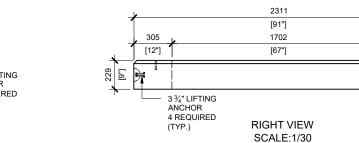

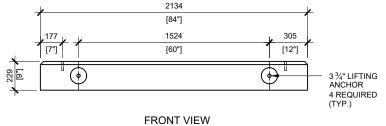

SCALE:1/30



MANUFACTURED: BROOKLIN, ON 1-800-655-3430 CONCRETE: 35MPa / 5,000PSI AIR ENTRAINMENT: 5-8%

REINFORCEMENT: STEEL TO CSA CAN A23.1 / A23.3. G30.18 Fy=400MPa

WEIGHT:

BCP330BC9 - 2,825lbs / 1,280kg

DRAWN BY: BCP330BC9

DATE: MAY/2020 BASE COLLAR FOR PRECAST FOUNDATION

305

[12"]

½" SLF INSERT 4 REQUIRED (TYP.)