




TOP VIEW SCALE:1/30

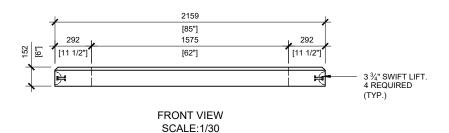

GENERAL NOTES:

- 1. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
- 2. EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
- 3. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
- 4. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT (I.E. SPREADER BAR)
- 5. TOP EDGES TO HAVE CHAMFER

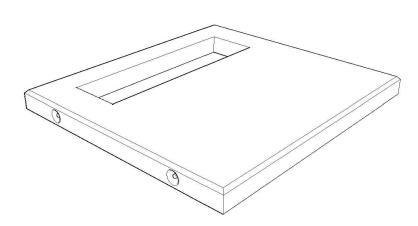





MANUFACTURED: BROOKLIN, ON 1-800-655-3430 CONCRETE: 35MPa / 5,000PSI AIR ENTRAINMENT: 5-8%

REINFORCEMENT: STEEL TO CSA
CAN A23.1 / A23.3. G30.18 Fy=400MPa

WEIGHT:

BCP330TM - 2,935lbs / 1,331kg

DRAWN BY:		•			$\overline{}$		1	_
N.CHAN	H	51		Ρ:	₹.≾			ı
		•	\smile	•	_	_	, ,	

DATE: DEC/2020

PRECAST TOP FOR TRANSFORMER FOUNDATION