


GENERAL NOTES:

- 1. CABLE ENTRY OPENINGS 4-3/4" PVC SEALS
- 2. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
- 3. EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
- 4. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
- ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT (I.E. SPREADER BAR)
- MAXIMUM BURIAL DEPTH 2084mm EXCAVATION OR 300mm FROM FINISHED GRADE TO TOP OF PRECAST SLAB



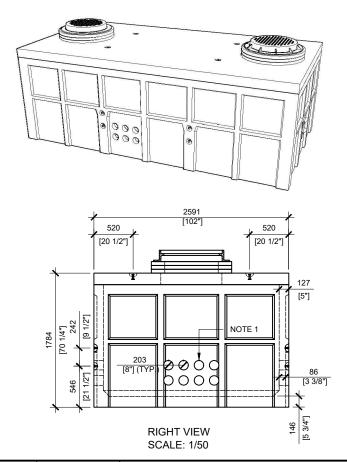

MANUFACTURED: BROOKLIN, ON 1-800-655-3430 CONCRETE: 35MPa / 5,000PSI
AIR ENTRAINMENT: 5-8%
REINFORCEMENT: STEEL TO CSA
CAN A23.1 / A23.3. G30.18 Fy=400MPa

WEIGHT: LID 9,471lbs/ 4,295kgs TOP 21,285lbs / 9,655kgs BCP505M - 30,756lbs / 13,950kg

DRAWN BY: N.CHAN	BCP505M
DATE:	PRECAST CONCRETE UTILITY MANHOLE
MAY/2020	