


## **GENERAL NOTES:**

- 1. UNITS ARE SEALED WITH BUTYL TAPE AT THE JOINTS
- 2. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
- 3. EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
- 4. MIN OVERHEAD CLEARANCE OF 18FT IS REQUIRED
- 5. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT
- 6. MAXIMUM BURIAL DEPTH = 1 METRE IN FIRM SOIL AWAY FROM ANY VEHICULAR TRAFFIC
- 7. CENTER PIPE MANIFOLD LENGTH 57-1/4"



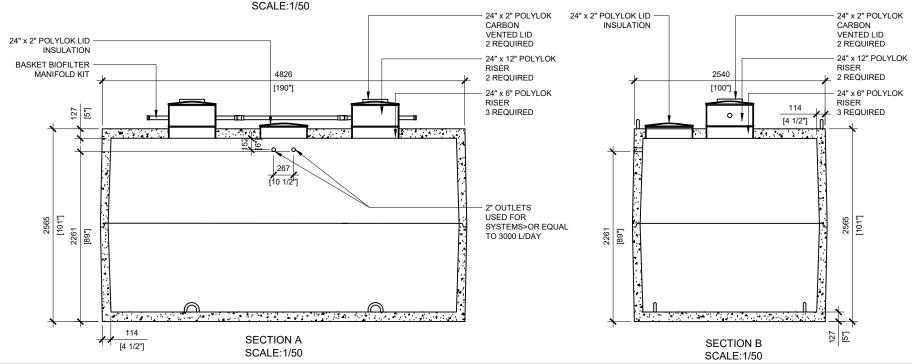

MANUFACTURED: OTTAWA, ON 1-800-655-3430 **CONCRETE TYPE:** SCC CONCRETE: 45MPa at 28 days / 6,500PSI

**AIR ENTRAINMENT: 5-8%** REINFORCEMENT: STEEL TO CSA CAN A23.1 /A23.3 G30.18 Fy=400MPa

WEIGHT: BOTTOM - 19,866lbs / 9,030kg TOP - 19,338lbs / 8,813kg **CSA APPROVED** MEETS CAN/CSA-B66

"AGINP"

DRAWN BY: N.CHAN DATE:

WATERLOO BT-22750

FEB/2020

5,000 IMPERIAL GALLON / 22,750 LITRES HOLDING TANK