
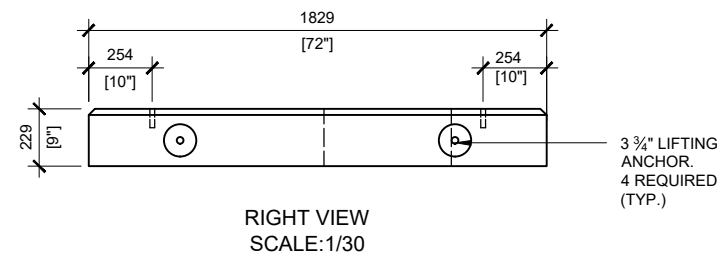


**GENERAL NOTES:**

1. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
2. EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
3. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
4. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT (I.E. SPREADER BAR)

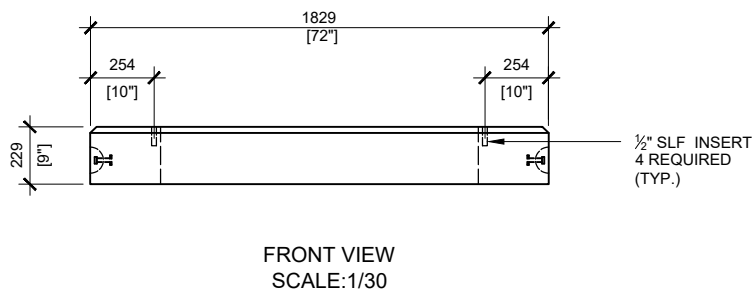

MANUFACTURED:  
BROOKLIN, ON  
1-800-655-3430

CONCRETE: 35MPa / 5,000PSI  
AIR ENTRAINMENT: 5-8%  
REINFORCEMENT : STEEL TO CSA  
CAN A23.1 / A23.3. G30.18  
Fy=400MPa

WEIGHT:  
BCP114T9M - 3,050lbs / 1,385kg

DRAWN BY:  
N.CHAN

DATE:  
MAY/2020

**BCP114T9M**

PRECAST TOP FOR TRANSFORMER FOUNDATION