



TOP VIEW
SCALE: 1/40

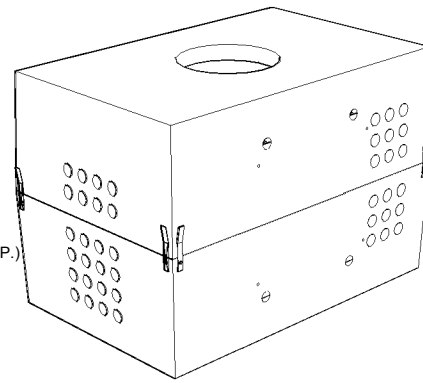


GENERAL NOTES:

1. CABLE ENTRY OPENINGS - 4-3/4" PVC SEALS
 2. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
 3. EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
 4. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
 5. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT (I.E. SPREADER BAR)
- * TYPICAL USE WOULD REQUIRE JW500 CAST IRON FRAME AND COVER

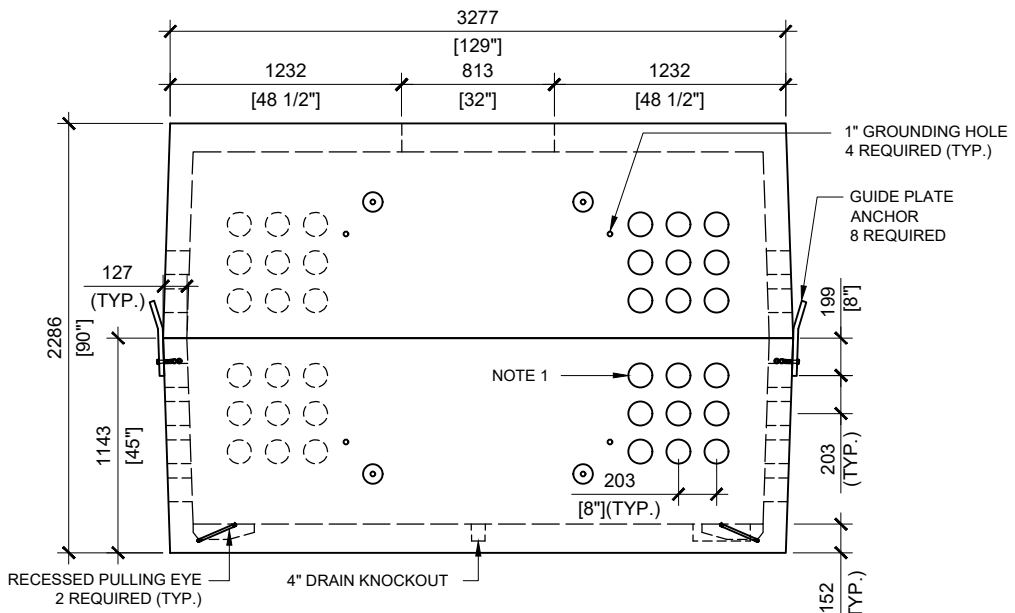

FRONT VIEW
SCALE: 1/40

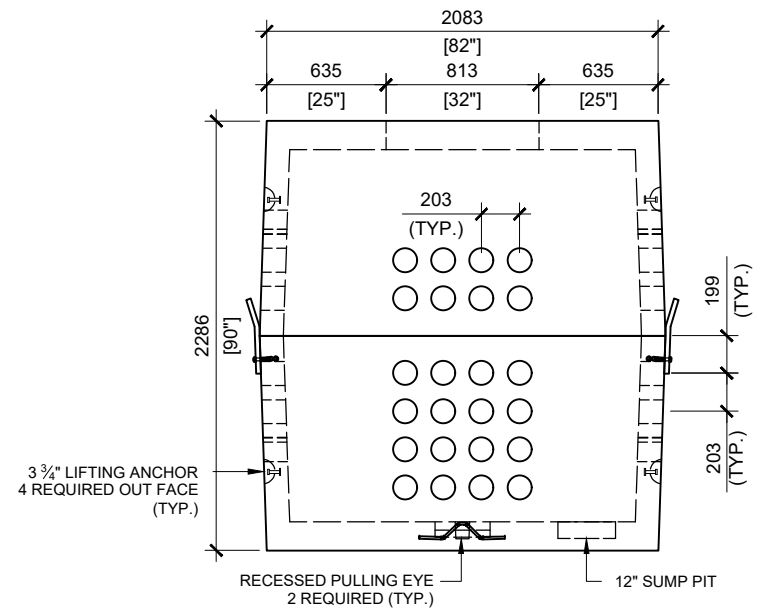

RIGHT VIEW
SCALE: 1/40



MANUFACTURED:
LINDSAY, ON
1-800-655-3430

CONCRETE: 35MPa / 5,000PSI
AIR ENTRAINMENT: 5-8%
REINFORCEMENT : STEEL TO CSA CAN
A23.1 / A23.3. G30.18 Fy=400MPa

WEIGHT:
BCP115HC -23,500lbs / 10,680kg

DRAWN BY:
PRASHAN

BCP115HC

DATE:
AUG/2023

PRECAST CONCRETE UTILITY MANHOLE
FOR BOULEVARD USE