




TOP VIEW SCALE:1/40

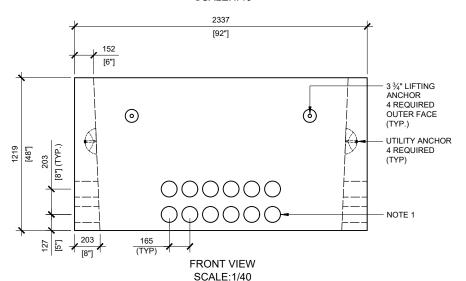

GENERAL NOTES:

- 1. CABLE ENTRY OPENINGS 4-3/4" PVC SEALS
- 2. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
- 3. EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
- 4. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
- 5. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT (I.E. SPREADER BAR)



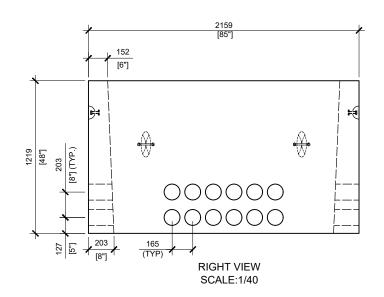



MANUFACTURED: BROOKLIN, ON 1-800-655-3430 CONCRETE: 35MPa / 5,000PSI AIR ENTRAINMENT: 5-8%

REINFORCEMENT: STEEL TO CSA CAN A23.1 / A23.3. G30.18 Fy=400MPa

WEIGHT:

BCP400P -7,600lbs / 3,450kg

DRAWN BY: N.CHAN BCP400P

DATE: MAY/2020 FOUNDATION FOR PADMOUNT TRANSFORMER