



FRONT VIEW SCALE:1/16

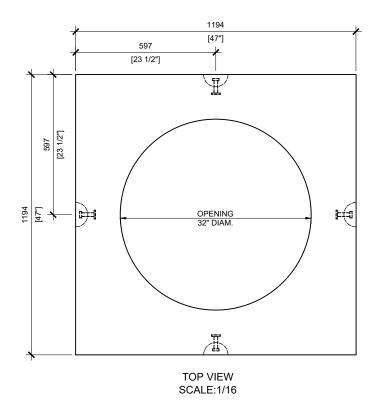

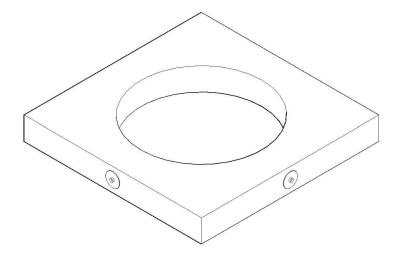

GENERAL NOTES:

- 1. CONCRETE COVER TO BE 35mm EXTERNAL FACE / 25mm INTERNAL FACE
- 2. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT
- 3. FOR H20 MANHOLES STACK UP TO FOUR RISERS
- 4. PROVIDE TYPE "S" MORTAR BETWEEN RISERS
- 5. JOINTS SHALL BE SEALED WITH FLEXIBLE WATERTIGHT RUBBER GASKETS
- * TYPICAL USE WOULD REQUIRE JW500 CAST IRON FRAME AND COVER



MANUFACTURED: BROOKLIN, ON 1-800-655-3430 CONCRETE: 35MPa / 5,000PSI AIR ENTRAINMENT: 6-8%

REINFORCEMENT: STEEL TO CSA CAN A23.1 / A23.3. G30.18 Fy=400MPa

WEIGHT:

BCP RISER- 649lbs / 294kg

DRAWN BY: S.RIMLAND **BCP RISER 6"**

DATE: AUG/2017 PRECAST CONCRETE RISER