



BTT-10000-BCP REACTOR			
POS.	ITEM#	DESCRIPTION	QUANTITY
1	413582	BTT-10000-BCP BIONEST REACTOR	1
2	408167	POLYLOK PLASTIC RISER 24"dia X 6"h	4
3	450046	POLYLOK LID 24" dia - VENTED COVER	2
4	*SUPPLIED BY BIONEST*	FLEXIBLE AIR DIFFUSER (2.5m)	2
5	*SUPPLIED BY BIONEST*	AIR LINE PIPE / MANIFOLD 2 OULETS	2
6	*SUPPLIED BY BIONEST*	BIONEST MEDIA BAG	67
7	408144	TUF-TITE EF-6" T-BAFFLE	2
8	408038	4 x 10" SOLID SEWER PIPE	2
9	112167	4" CAST.A.SEAL #452.0450	2
10	112622	4" CAST.A.SEAL #452.0450 (CLOSED FACE)	2
11	*SUPPLIED BY BIONEST*	Ø1-1/2" PVC ELBOW 90° BELL-END TO FACE UPWARD	2
12	*SUPPLIED BY BIONEST*	ABS PLASTIC STRIPS 5" x 24"	10
13	*SUPPLIED BY BIONEST*	AIR DIFFUSER CAGE 3.5" x 23"	10
2504			

GENERAL NOTES:

- 1. UNITS ARE SEALED WITH BUTYL TAPE AT THE JOINTS
- 2. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
- 3. EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
- 4. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
- 5. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING **EQUIPMENT**
- 6. MAXIMUM BURIAL DEPTH = 1 METRE IN FIRM SOIL AWAY FROM ANY VEHICULAR TRAFFIC

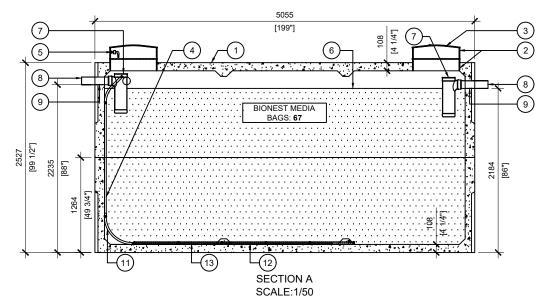

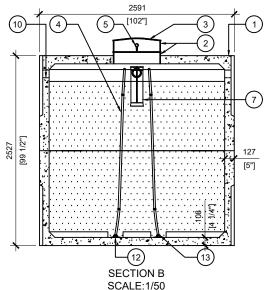



MANUFACTURED: BROOKLIN, ON 1-800-655-3430

CONCRETE: 35MPa at 28 days/5000PSI AIR ENTRAINMENT: 5-8% REINFORCEMENT: STEEL TO CSA CAN A23.1 /A23.3 G30.18 Fy=400MPa

WEIGHT: 34,870lbs / 15,820kg BOTTOM: 17,690lbs / 8,024kg **TOP:** 17,180lbs / 7,792kg MEETS CAN/CSA-B66

BNQ CERTIFIED

BTT-10000-BCP BIONEST REACTOR DRAWN BY: N.CHAN 22750L / 5000 IMPERIAL GAL. BIONEST TANK

DATE: WORKING CAPACITY: 23,251L TO INVERT OF OUTLET APR/2020

TOTAL CAPACITY: 25,852L TO UNDERSIDE OF CHAMBER LID