
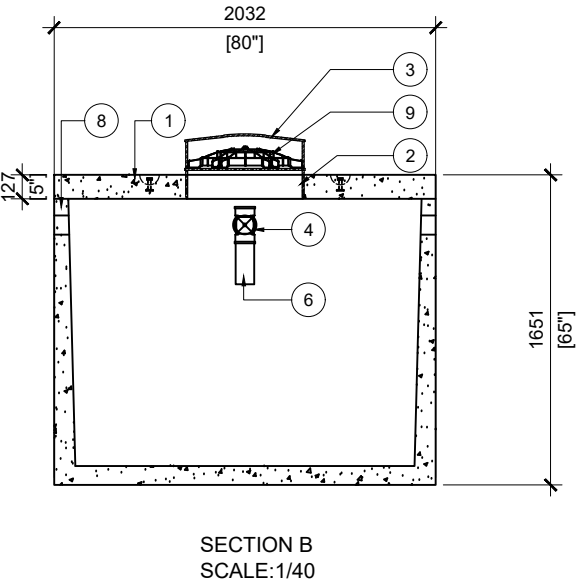


BTT-3400-BCP PRIMARY TREATMENT			
POS.	ITEM #	DESCRIPTION	QUANTITY
1	413572	BTT-3400-BCP PRIMARY TREATMENT	1
2	408167	POLYLOK PLASTIC RISER 24"dia X 6"h	4
3	450027	POLYLOK LID 24"dia - DOMED	2
4	408041	4" PVC TEE	1
5	408144	TUF-TITE EFFLUENT FILTER 6" C/W T-BAFF	1
6	112707	4 x 16" SOLID SEWER PIPE	3
7	112167	4" CAST.A.SEAL #452.0450	2
8	112622	4" CAST.A.SEAL #452.0450 (CLOSED FACE)	2
9	450103	POLYLOK 24" SAFETY LID	2

**GENERAL NOTES:**

1. UNITS ARE SEALED WITH BUTYL TAPE AT THE JOINTS
2. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
3. EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
4. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
5. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT
6. MAXIMUM BURIAL DEPTH = 1 METRE IN FIRM SOIL AWAY FROM ANY VEHICULAR TRAFFIC
7. MUST BE SHIPPED WITH "BTT - 3400 REACTOR"

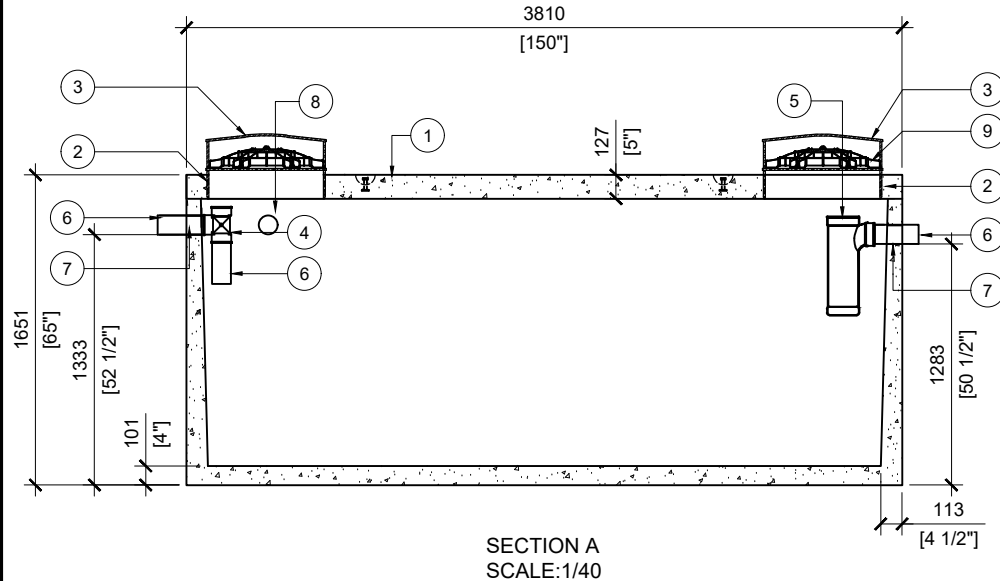

	<b>MANUFACTURED:</b> LINDSAY, ON 1-800-655-3430	<b>CONCRETE:</b> 35MPa at 28 days/5000PSI <b>AIR ENTRAINMENT:</b> 5-8% <b>REINFORCEMENT:</b> STEEL TO CSA CAN A23.1 /A23.3 G30.18 Fy=400MPa	<b>UNIT WEIGHT:</b> 17,821lbs / 8,083kg <b>TANK:</b> 12,474lbs / 5,658kg <b>LID:</b> 5,347lbs / 2,425kg MEETS CAN/CSA-B66 BNQ CERTIFIED	<b>DRAWN BY:</b> SR	<b>BTT-3400-BCP PRIMARY TREATMENT</b> 7500L / 1650 IMPERIAL GAL. BIONEST TANK
				<b>DATE:</b> JAN/2024	<b>WORKING CAPACITY:</b> 8,181L TO INVERT OF INLET <b>TOTAL CAPACITY:</b> 9,489L TO UNDERSIDE OF CHAMBER LID