
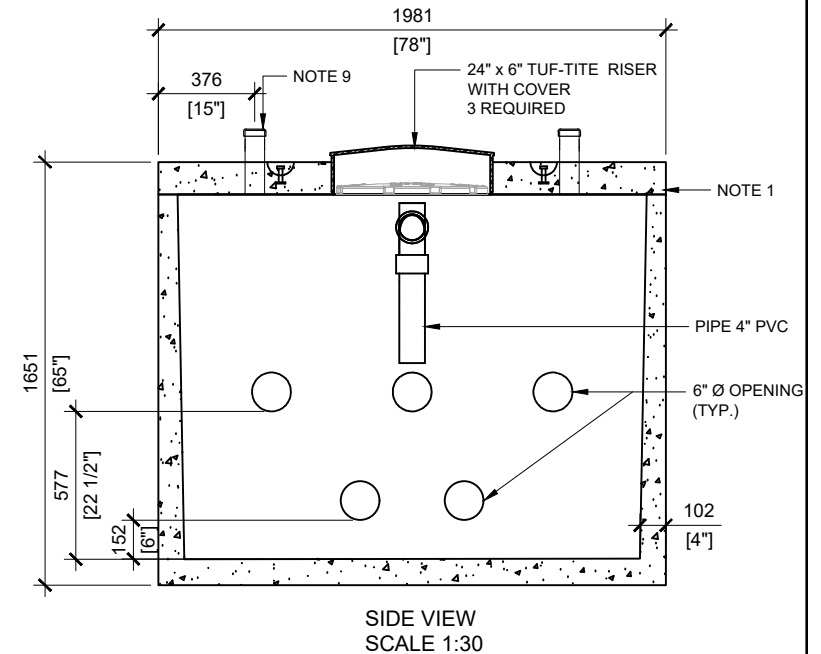


MAXIMUM FLOW RATE: 70L/min.
FOR THE SEPARATION OF OIL AND GREASE.

GENERAL NOTES:

1. UNITS ARE SEALED WITH AN OIL RESISTANT BUTYL TAPE AT THE JOINTS (CONSEAL CS-440)
2. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
3. EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
4. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
5. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT.
6. MAXIMUM BURIAL DEPTH = 1 METRE IN FIRM SOIL AWAY FROM ANY VEHICULAR TRAFFIC
7. NOT INTENDED FOR STORMWATER APPLICATIONS.
8. CSA PERFORMANCE DATA PARAMETERS:
WATER = 23° (+/- 2°C)
OIL = 0.92 (+/- 0.01) SPECIFIC GRAVITY AT 20°C
9. 3" DIAMETER PVC PIPING FOR VENT 6 REQUIRED. ONLY 3 OPERATIONAL AT ONE TIME
10. TUF-TITE SAFETY LIDS INSTALLED IN ALL OPENING AS PER CSA-B66-21

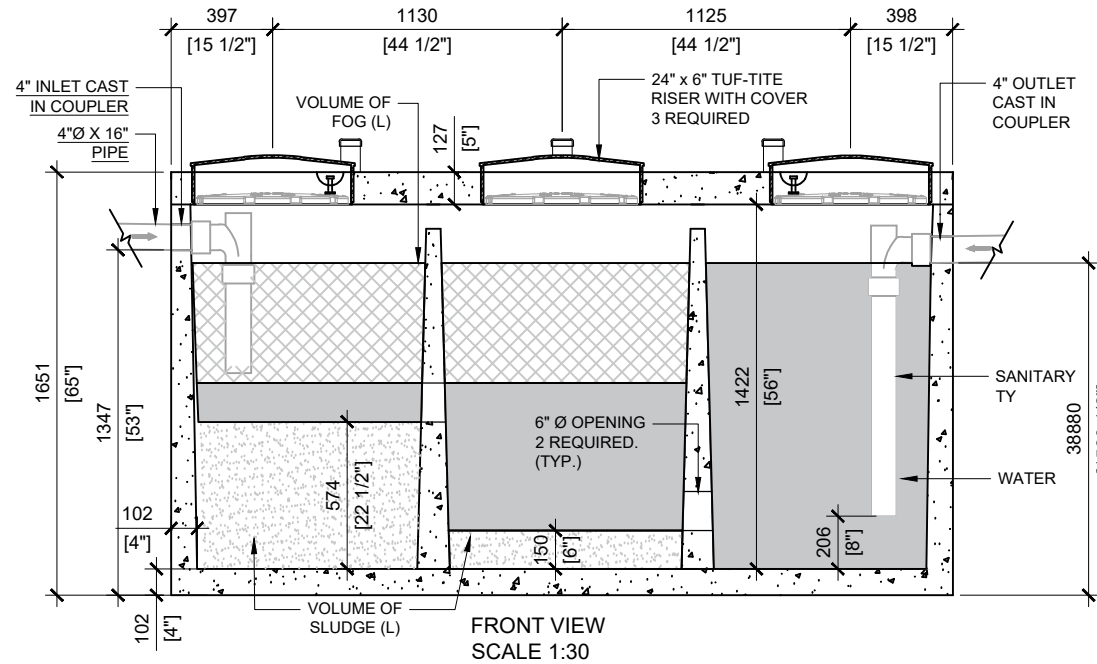

MANUFACTURED:
LINDSAY, ON
1-800-655-3430

CONCRETE: 35MPa / 5,000PSI
AIR ENTRAINMENT: 5-8%
REINFORCEMENT : CSA CAN A23.1 /
A23.3 ASTM A1064

UNIT WEIGHT: 15,955lbs/ 7,237kg

DRAWN BY:
JAY PATEL

DATE:
APRIL/2023

MODEL 130 GREASE/OIL/SEDIMENT INTERCEPTOR

5500 LITRES
MAXIMUM FLOW RATE: 70 L/MINUTE