



GENERAL NOTES:

- 1. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
- 2. SITE MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK
- 3. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
- 4. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT (I.E. SPREADER BAR)



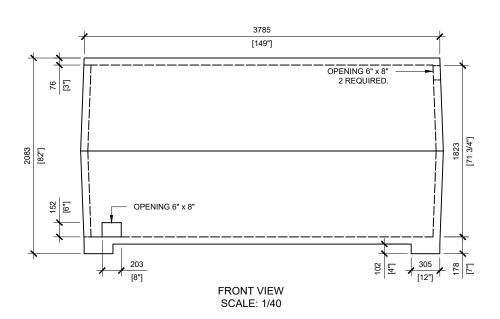

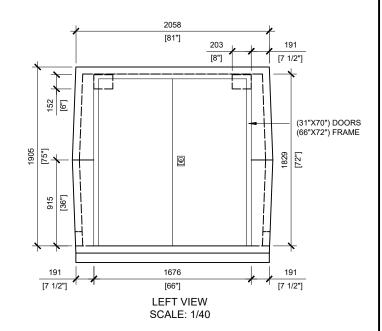

MANUFACTURED: BROOKLIN, ON 1-800-655-3430 CONCRETE: 35MPa / 5,000PSI AIR ENTRAINMENT: 5-8%

REINFORCEMENT: STEEL TO CSA CAN A23.1 / A23.3. G30.18 Fy=400MPa

WEIGHT:

MODEL 70 - 16,280lbs / 7,400kg

DRAWN BY: N.CHAN MODEL 70

DATE: JUL/2020 PRECAST CONCRETE UTILITY BUILDING WITH DOOR

TYPICAL USE: STORAGE / ELECTRICAL BUILDING