


## **GENERAL NOTES:**

- 1. UNITS ARE SEALED WITH BUTYL TAPE AT THE JOINTS
- 2. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
- EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
- 4. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
- 5. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT (I.E. SPREADER BAR)
- 6. MAXIMUM BURIAL DEPTH = 1 METRE IN FIRM SOIL AWAY FROM ANY VEHICULAR TRAFFIC



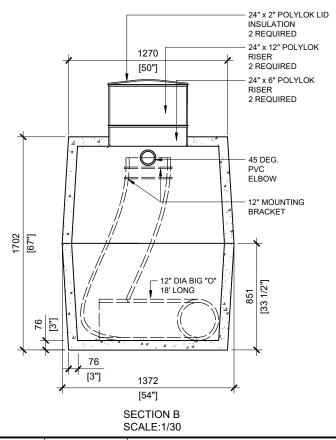

MANUFACTURED: BROOKLIN, ON 1-800-655-3430 AIR ENTRAINMENT: 6-8%
REINFORCEMENT: STEEL TO CSA CAN
A23.1 /A23.3 G30.18 Fy=400MPa

UNIT WEIGHT: 6,490lbs / 2,943kg CPA CERTIFIED MEETS CAN/CSA-B66 DRAWN BY:
N.CHAN

WATERLOO AD-3600

DATE:
MAR/2020

800 IMPERIAL GALLON / 3,600 LITRES