



TOP VIEW  
SCALE:1/30

**GENERAL NOTES:**

1. UNITS ARE SEALED WITH BUTYL TAPE AT THE JOINTS
2. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
3. EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
4. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
5. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT (I.E. SPREADER BAR)
6. MAXIMUM BURIAL DEPTH = 1 METRE IN FIRM SOIL AWAY FROM ANY VEHICULAR TRAFFIC

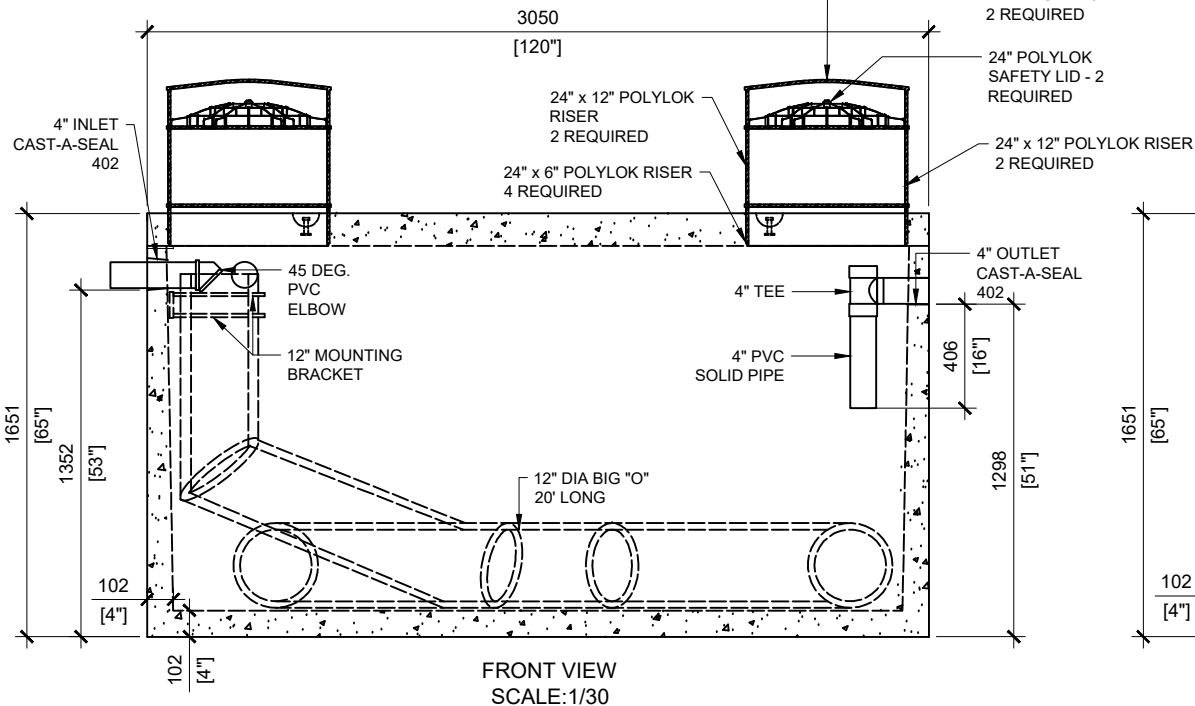

FRONT VIEW  
SCALE:1/30

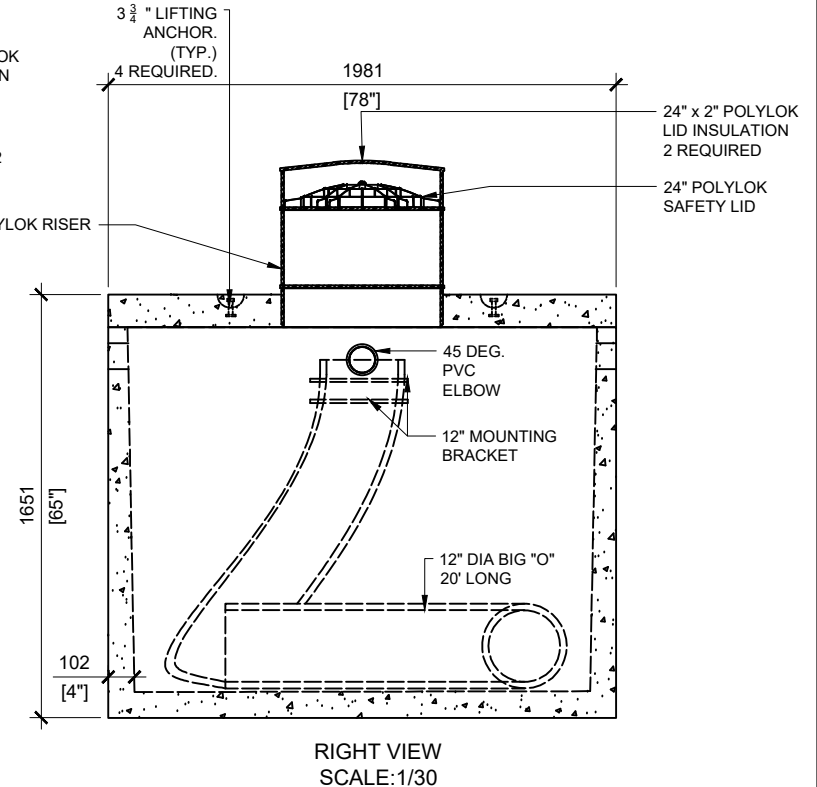

RIGHT VIEW  
SCALE:1/30



MANUFACTURED:  
LINDSAY, ON  
1-800-655-3430

CONCRETE: 35MPa / 5000PSI  
AIR ENTRAINMENT: 5-8%  
REINFORCEMENT: CSA CAN A23.1 / A23.3  
ASTM A1064

UNIT WEIGHT: 10,455lbs / 6,735kg

DRAWN BY:  
PRASHAN

DATE:  
DEC/2023

**WATERLOO AD-5500**

5,500 LITRES