



TOP VIEW
SCALE: 1/16

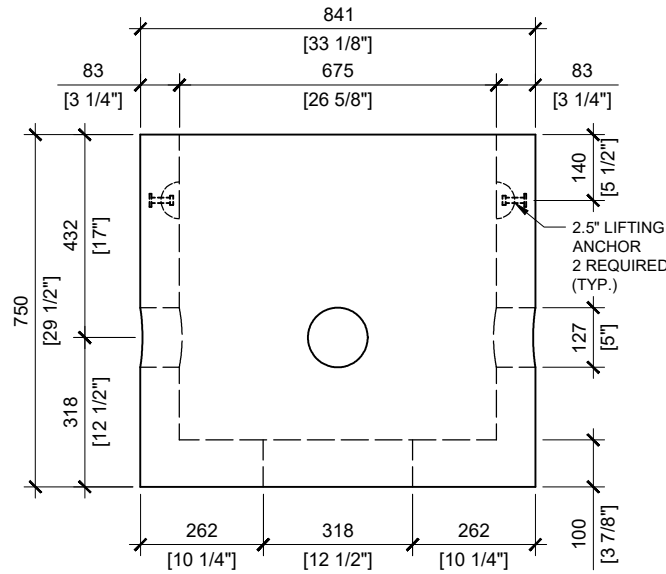

FRONT VIEW
SCALE: 1/16

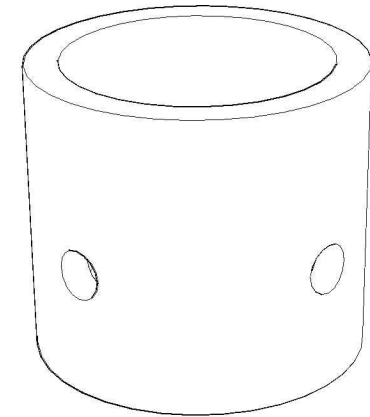

GENERAL NOTES:

1. CABLE ENTRY OPENINGS - 5" O.D.
2. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
3. EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
4. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
5. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT (I.E. SPREADER BAR)

* TYPICAL USE WOULD REQUIRE JW150 CAST IRON FRAME AND COVER (OPSD 401.01)



MANUFACTURED:
BROOKLIN, ON
1-800-655-3430

CONCRETE: 35MPa / 5,000PSI
AIR ENTRAINMENT: 5-8%
REINFORCEMENT : STEEL TO CSA CAN
A23.1 / A23.3. G30.18 Fy=400MPa

WEIGHT:
2112.03 -1,030lbs / 470kg

DRAWN BY:
S.RIMLAND

DATE:
JUL/2020

BCP2112.03

PRECAST CONCRETE ELECTRICAL HANDHOLE
MEETS OPSD 2112.030